

July 24, 2019

Hon. President & Board of Trustees
Village of Stickney
6533 West Pershing Road
Stickney, Illinois 60402

Re: **2019 P.C.C. Pavement Improvements**

Mesdames & Gentlemen:

Enclosed is the Tabulation of Bids for the bids that were received and opened for the above-captioned project at 10:00 a.m. on July 24, 2019. Three (3) bids were received and verified, with no errors found.

The low bid was submitted by M&J Asphalt Paving Company, Inc., submitting a proposal in the amount of \$67,538.00, which was \$3,899.00 (or 5.46%) below the Engineer's Estimate of \$71,437.00.


This project will include the construction of a new driveway entrance at the Fire Department, a fuel island pad at the Public Works yard, a pad for the portable restrooms at the Park Pavilion, and a pad and sidewalk for the portable restrooms at O'Reilly Park.

M&J Asphalt Paving Company, Inc. is qualified to complete this project. Their company performs both hot-mix asphalt paving and concrete construction work and has successfully completed a number of projects for our office in neighboring municipalities.

Therefore, we recommend that the Contract is awarded to **M&J Asphalt Paving Company, Inc., 3124 S. 60th Court, Cicero, IL 60804**, in the amount of **\$67,538.00**, based on their lowest responsible bid submittal.

Please contact me if you have any questions regarding this project.

Sincerely,

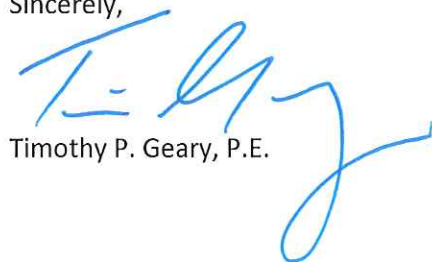

Timothy P. Geary, P.E.

TPG

Enclosure

cc: Ms. Audrey McAdams, Clerk, w/Enc.
Mr. Joe Lopez, P.W. Director, w/Enc.
File No. 19235

OWNER: Village of Stickney
 PROJECT DESCRIPTION: 2019 P.C.C. Pavement Improvements
 BID OPENING: July 24, 2019 @ 10:00 am

PROJECT NO : 19235

Item No	Description	Unit	Quantity	Engineers Estimate		M&J Asphalt Paving Co.		J. Nardulli Concrete, Inc.		Davis Concrete Const. Co.	
				Unit Price	Amount	Unit Price	Amount	Unit Price	Amount	Unit Price	Amount
1	Earth Excavation	CU YD	91	60.00	5,460.00	65.00	5,915.00	50.00	4,550.00	75.00	6,825.00
2	Subbase Granular Material, Type B	TON	106	40.00	4,240.00	17.00	1,802.00	40.00	4,240.00	38.00	4,028.00
3	Combination Concrete Curb and Gutter Removal and Replacement	FOOT	200	45.00	9,000.00	42.00	8,400.00	45.00	9,000.00	63.00	12,600.00
4	Pavement Removal	SQ YD	320	15.00	4,800.00	14.00	4,480.00	20.00	6,400.00	36.00	11,520.00
5	Welded Wire Reinforcement, Type A	SQ YD	376	7.00	2,632.00	8.00	3,008.00	15.00	5,640.00	10.00	3,760.00
6	Dowel Bars, 3/4" (Drilled in Place)	EACH	28	40.00	1,120.00	15.00	420.00	10.00	280.00	10.00	280.00
7	Tie Bars, 5/8"	EACH	148	12.00	1,776.00	7.00	1,036.00	10.00	1,480.00	8.00	1,184.00
8	Portland Cement Concrete Pavement, 9"	SQ YD	320	75.00	24,000.00	70.00	22,400.00	72.00	23,040.00	125.00	40,000.00
9	Portland Cement Concrete Pavement, 8"	SQ YD	56	75.00	4,200.00	80.00	4,480.00	72.00	4,032.00	100.00	5,600.00
10	Sidewalk Removal	SQ FT	60	2.50	150.00	10.00	600.00	5.00	300.00	10.00	600.00
11	Portland Cement Concrete Sidewalk, 5"	SQ FT	452	10.00	4,520.00	13.00	5,876.00	13.00	5,876.00	15.00	6,780.00
12	Curing Membrane and Protective Coat	SQ YD	428	1.75	749.00	3.25	1,391.00	2.75	1,177.00	3.00	1,284.00
13	Pavement Replacement - Surface Course, 3"	SQ YD	112	45.00	5,040.00	40.00	4,480.00	38.00	4,256.00	75.00	8,400.00
14	Catch Basins to be Adjusted	EACH	1	750.00	750.00	450.00	450.00	475.00	475.00	600.00	600.00
15	Guard Posts to be Removed	EACH	2	100.00	200.00	100.00	200.00	150.00	300.00	200.00	400.00
16	Guard Posts	EACH	4	700.00	2,800.00	650.00	2,600.00	850.00	3,400.00	650.00	2,600.00
Totals:					\$ 71,437.00		\$ 67,538.00		\$ 74,446.00		\$ 106,461.00
Bid Error Corrections:											
Corrected Totals - - -							\$ 67,538.00		\$ 74,446.00		\$ 106,461.00
Over / Under - - - -							-3,899.00		3,009.00		35,024.00
Percent - - - - -							-5.46%		4.21%		49.03%